



DESCRIPTION

The A4056 is a complete constant-current /constant -voltage linear charger for single cell lithium-ion batteries. Its ThinSOT package and low external component count make the A4056 ideally suited for portable applications. Furthermore, the A4056 is specifically designed to work within USB power specifications.

No external sense resistor is needed, and no blocking diode is required due to the internal MOSFET architecture. Thermal feedback regulates the charge current to limit the die temperature during high power operation or high ambient temperature. The charge voltage is fixed at 4.2V, and the charge current can be programmed externally with a single resistor. The A4056 automatically terminates the charge cycle when the charge current drops to 1/10th the programmed value after the final float voltage is reached.

When the input supply (wall adapter or USB supply) is removed, the A4056 automatically enters a low current state, dropping the battery drain current to less than 2µA. The A4056 can be put into shutdown mode, reducing the supply current to 25µA.

Other features include charge current monitor, under-voltage lockout, automatic recharge and a status pin to indicate charge termination and the presence of an input voltage.

The A4056 is available in SOT-26 package.

ORDERING INFORMATION

Package Type	Part Number	
SOT-26	E6	A4056E6R
		A4056E6VR
Note	V: Halogen free Package R: Tape & Reel	
AiT provides all RoHS products Suffix " V " means Halogen free Package		


FEATURES

- Programmable charge current up to 500mA
- No MOSFET, sense resistor or blocking diode required
- Complete linear charger in ThinSOT package for single cell lithium-ion batteries
- Constant-current/constant-voltage operation with thermal regulation to maximize charge rate without risk of overheating
- Charges single cell li-ion batteries directly from USB port
- Preset 4.2V charge voltage with 1% accuracy □
- Charge current monitor output for gas gauging
- Automatic recharge
- Charge status output pin
- C/10 charge termination
- 25µA supply current in shutdown
- 2.9V trickle charge threshold (A4056)
- Soft-start limits inrush current
- Available in SOT-26 Package

APPLICATION


- Cellular Telephones, PDAs, MP3 Players
- Bluetooth Applications

TYPICAL APPLICATION

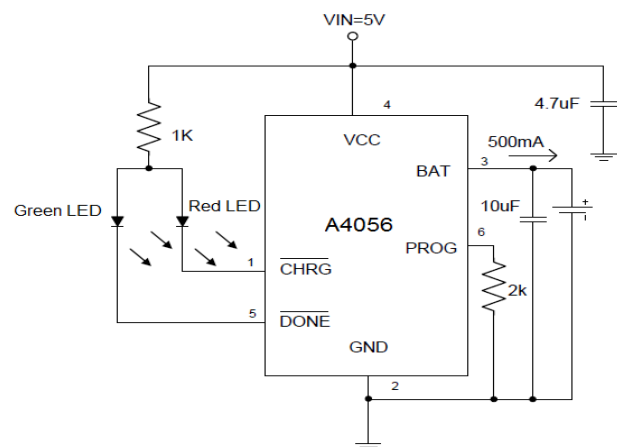



PIN DESCRIPTION

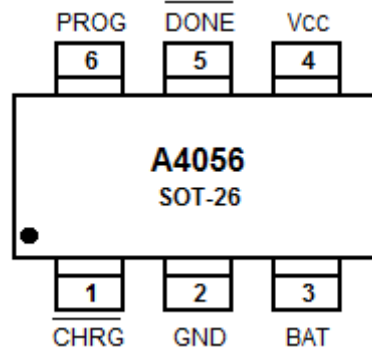

Pin #	Symbol	Function
1	$\overline{\text{CHRG}}$	Open-Drain Charge Status Output. When the battery is charging, the CHRG pin is pulled low by an internal N-channel MOSFET. When the charge cycle is completed, a weak pull-down of approximately 20 μA is connected to the CHRG pin, indicating an “AC present” condition. When the A4056 detects an undervoltage lockout condition, CHRG is forced high impedance.
2	GND	Ground.
3	BAT	Charge current output. Provides charge current to the battery and regulates the final float voltage to 4.2V. An internal precision resistor divider from this pin sets the float voltage which is disconnected in shutdown mode.
4	V _{CC}	Positive input supply voltage. Provides power to the charger. V _{CC} can range from 4.25V to 6.5V and should be bypassed with at least a 1 μF capacitor. When V _{CC} drops to within 30mV of the BAT pin voltage, the A4056 enters shutdown mode, dropping I _{BAT} to less than 2 μA .
5	$\overline{\text{DONE}}$	Full indication output, when fully charged, DONE port is an internal N-channel MOSFET placed in low position. In the charging process, low-power lock condition is detected, the input is too high to detect locking conditions, DONE-Z state.
6	PROG	Charge current program, charge current monitor and shutdown pin. The charge current is programmed by connecting a 1% resistor, R _{PROG} to ground. When charging in constant-current mode, this pin serves to 1V. In all modes, the voltage on this pin can be used to measure the charge current using the following formula : $I_{\text{BAT}} = (V_{\text{PROG}}/R_{\text{PROG}}) \times 1000$ The PROG pin can also be used to shut down the charger. Disconnecting the program resistor from ground allows a 3 μA current to pull the PROG pin high. When it reaches the 1.21V shutdown threshold voltage, the charger enters shutdown mode, charging stops and the input supply current drops to 25 μA . This pin is also clamped to approximately 2.4V. Driving this pin to voltages beyond the clamp voltage will draw currents as high as 1.5mA. Reconnecting R _{PROG} to ground will return the charger to normal operation.



ABSOLUTE MAXIMUM RATINGS

V _{CC} , Input Supply Voltage	V _{SS} -0.3V ~ V _{SS} +10V
V _{PROG} , ISET pin Voltage	V _{SS} -0.3V ~ V _{CC} +0.3V
V _{BAT} , BAT pin Voltage	V _{SS} -0.3V ~ 7V
V _{CHRG} , CHAG pin Voltage	V _{SS} -0.3V ~ V _{SS} +10V
P _D , Power Dissipation	SOT-26 250mW
I _{BAT} , BAT pin Current	500mA
I _{PROG} , ISET pin Current	800μA
T _{OPA} , Operating Ambient Temperature	-40°C ~ +85°C
T _{STR} , Storage Temperature	-65°C ~ +125°C

Stress beyond above listed "Absolute Maximum Ratings" may lead permanent damage to the device. These are stress ratings only and operations of the device at these or any other conditions beyond those indicated in the operational sections of the specifications are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.



ELECTRICAL CHARACTERISTICS


T_A=25°C, Unless specifically designated

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Input supply voltage	V _{CC}		4.25		6.5	V
Input overvoltage	V _{OVP}		6.2			V
Overvoltage release	V _{dp}		5.8			V
Input supply current	I _{CC}	Charge mode, R _{PROG} =10K		300	2000	μA
		Standby mode		200	500	
		Shutdown mode (R _{PROG} not connected, V _{CC} <V _{BAT} or V _{CC} <V _{UV})		25	50	
Regulated Output Voltage	V _{FLOAT}	0°C≤T _A ≤85°C, I _{BAT} =40mA	4.158	4.2	4.242	V
BAT pin Current	I _{BAT}	R _{PROG} =10k, Current mode	93	100	107	mA
		R _{PROG} =2k, Current mode	465	500	535	
		Standby mode, V _{BAT} =4.2V	0	-2.5	-6	μA
		Shutdown mode		1	2	
		Sleep mode, V _{CC} =0V		1	2	
Trickle charge current	I _{TRIKL}	V _{BAT} <V _{TRIKL} , R _{PROG} =2k	20	45	70	mA
Trickle charge Threshold Voltage	V _{TRIKL}	R _{PROG} =10K , V _{BAT} Rising	2.8	2.9	3.0	V
Trickle voltage hysteresis voltage	V _{TRHYS}	R _{PROG} =10k	60	80	110	mV
V _{CC} undervoltage lockout Threshold	V _{UV}	From V _{CC} low to high	3.7	3.8	3.93	V
V _{CC} undervoltage lockout hysteresis	V _{UVHYS}		150	200	300	mV
Manual shutdown threshold voltage	V _{msd}	PROG pin rising	1.15	1.21	1.30	V
		PROG pin falling	0.9	1.0	1.1	
V _{CC} -V _{BAT} Lockout Threshold voltage	V _{asd}	V _{CC} from low to high	70	100	140	mV
		V _{CC} from high to low	5	30	50	
C/10 Termination Current Threshold	I _{term}	R _{PROG} =10k	0.085	0.10	0.115	mA/
		R _{PROG} =2k	0.085	0.10	0.115	mA
PROG pin Voltage	V _{PROG}	R _{PROG} =10k, Current mode	0.93	1.0	1.07	V
CHRG pin weak pull-down Current	I _{CHRG}	V _{CHRG} =5V	8	20	35	μA
CHRG pin Output low voltage	V _{CHRG}	I _{CHRG} =5mA		0.35	0.6	V
Recharge Battery threshold Voltage	ΔV _{RECG}	V _{FLOAT} - V _{RECHRG}		100	200	mV




TYPICAL PERFORMANCE CHARACTERISTICS


1. PROG Pin Voltage vs. Supply Voltage (Constant Current Mode)

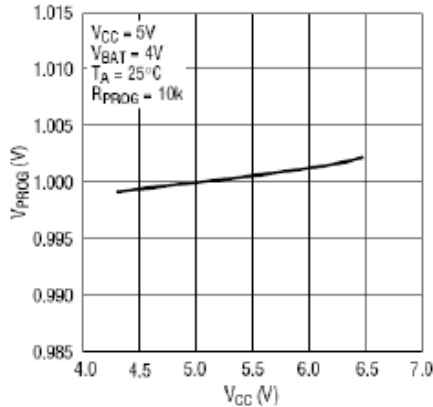


2. PROG Pin Voltage vs. Temperature

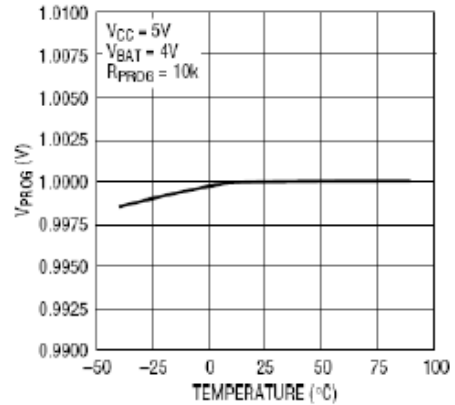


3. Charge Current vs. PROG Pin Voltage

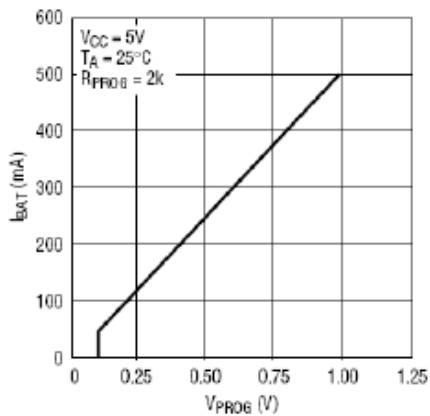


4. PROG Pin Pull-Up Current vs. Temperature and Supply Voltage

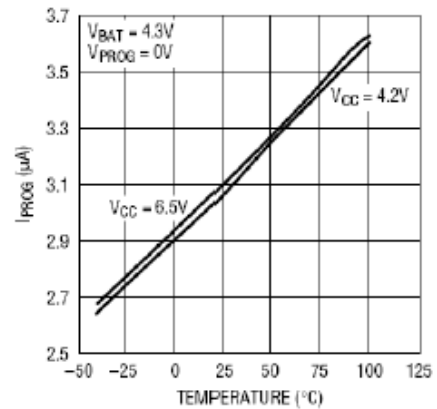

5. PROG Pin Current vs. PROG Pin Voltage (Pull-Up Current)

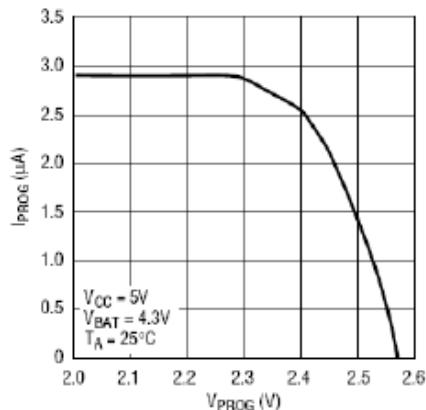


6. PROG Pin Current vs. PROG Pin Voltage (Clamp Current)

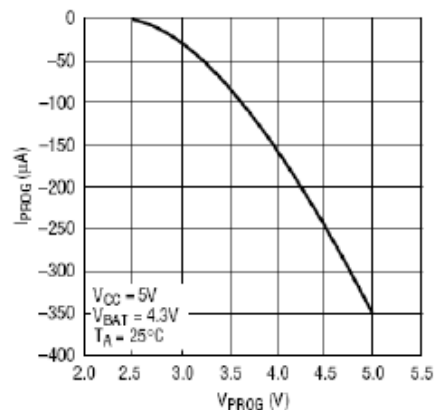





7. Regulated Output (Float) Voltage vs. Charge Current

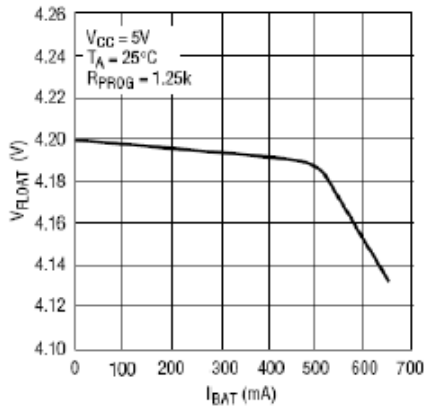


8. Regulated Output (Float) Voltage vs. Temperature

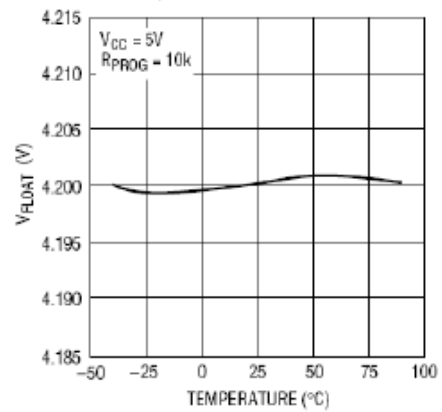


9. Regulated Output (Float) Voltage vs. Supply Voltage

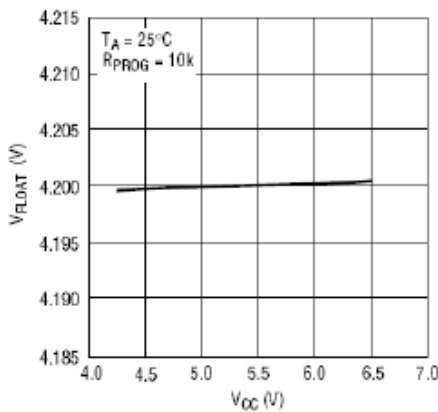


10. \overline{CHRG} Pin I-V Curve (Strong Pull-Down State)

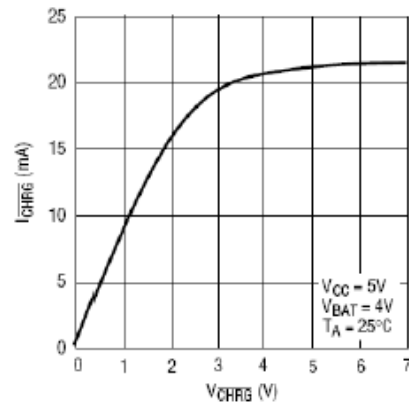

11. \overline{CHRG} Pin Current vs. Temperature (Strong Pull-Down State)

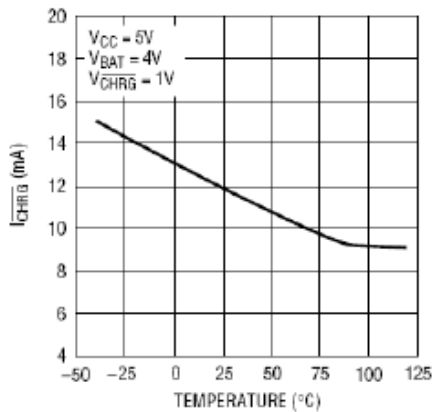


12. \overline{CHRG} Pin I-V Curve (Weak Pull-Down State)

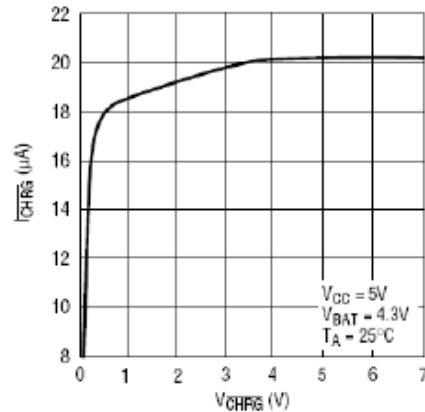





13. $\overline{\text{CHRG}}$ Pin Current vs. Temperature
(Weak Pull-Down State)

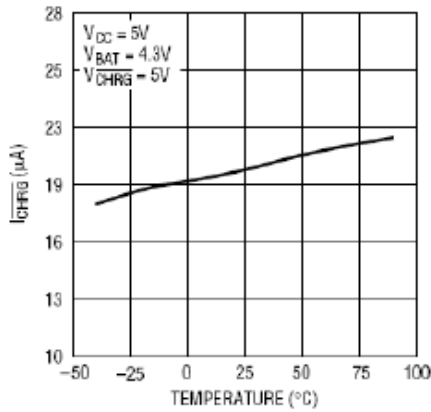


14. Trickle Charge Current vs. Temperature

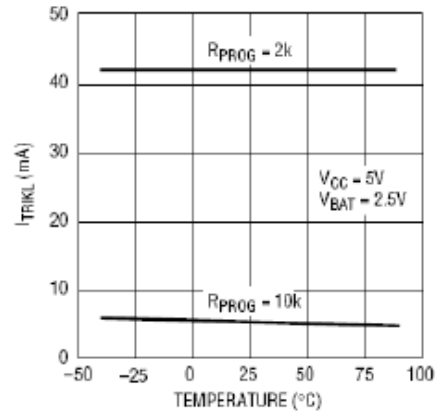


15. Trickle Charge Current vs. Supply Voltage

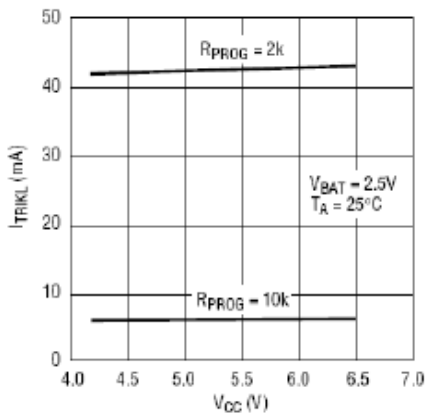


16. Trickle Charge Threshold vs. Temperature

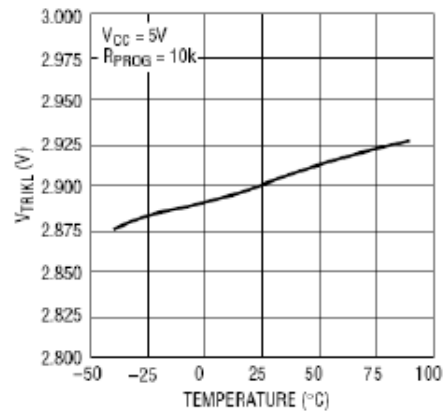

17. Charge Current vs. Battery Voltage

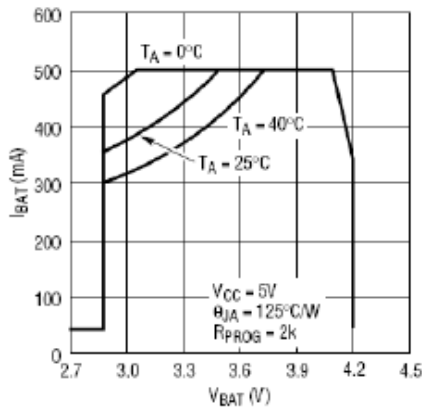


18. Charge Current vs. Supply Voltage

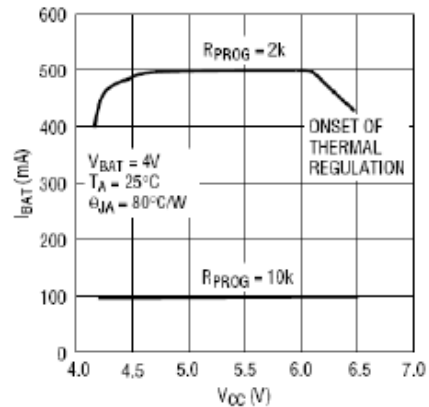




BLOCK DIAGRAM

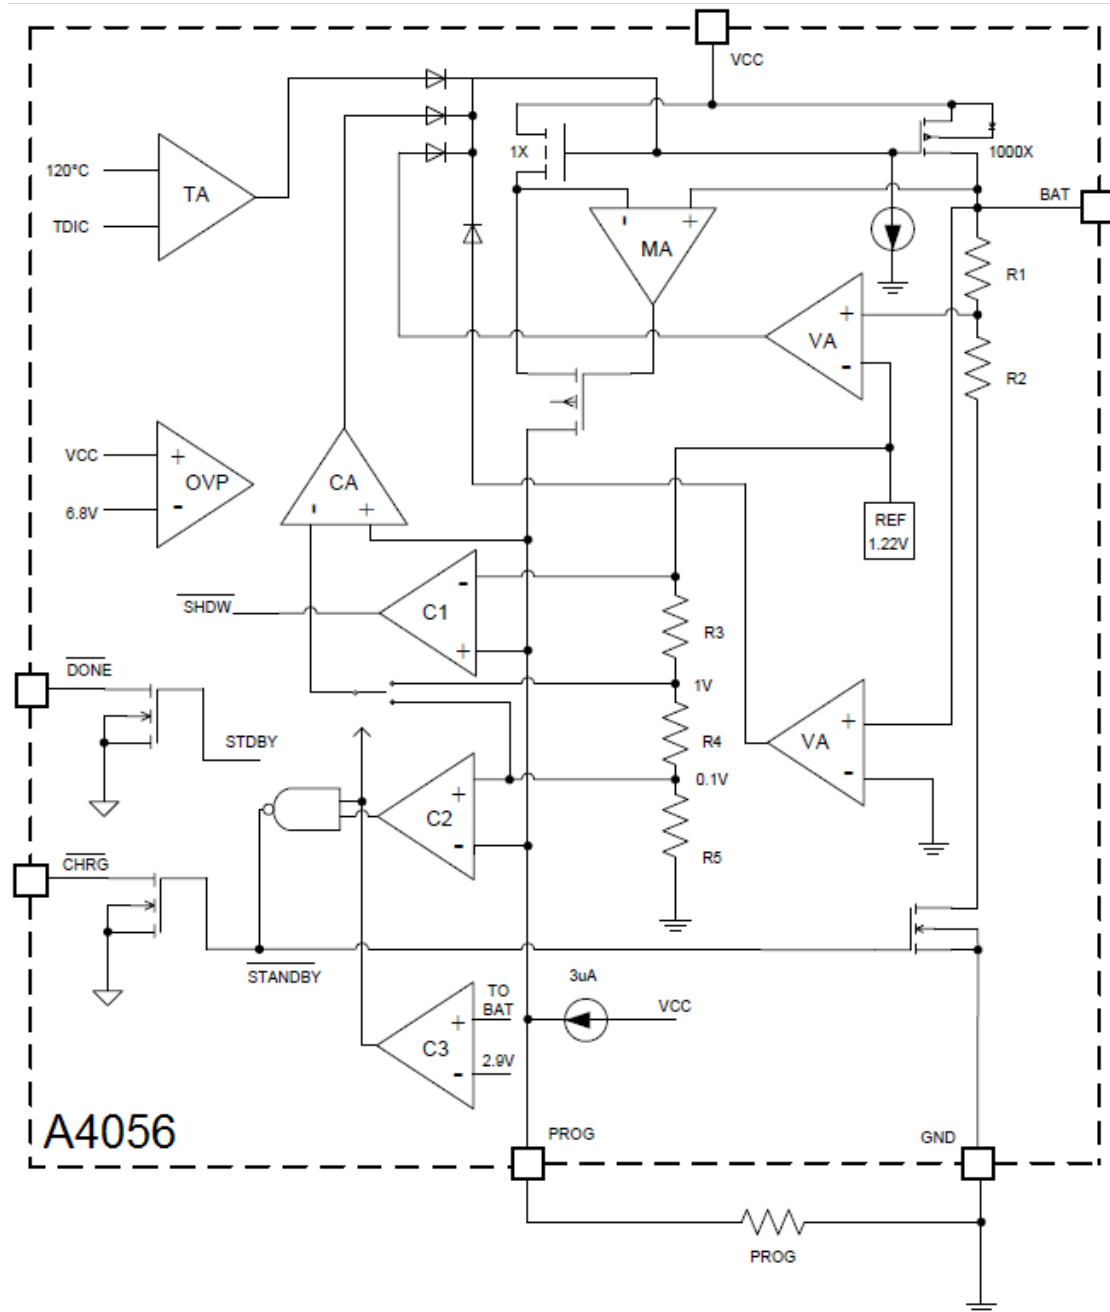



PACKAGE INFORMATION

Dimension in SOT-26 Package (Unit: mm)

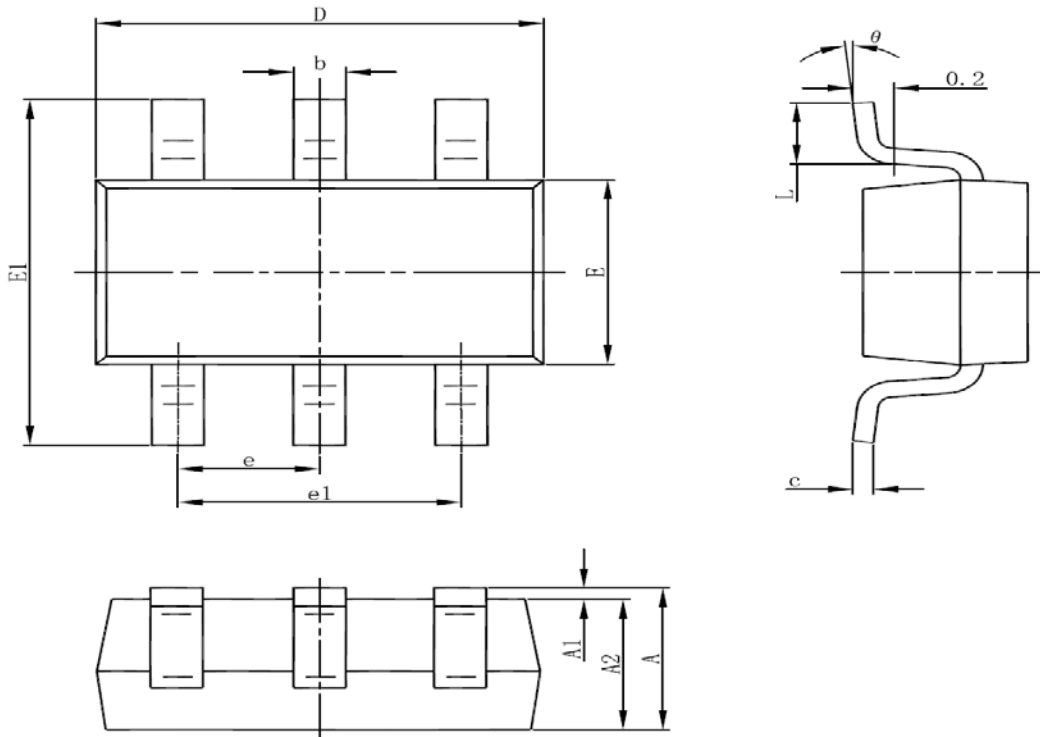

SYMBOL	MIN	MAX
A	1.050	1.250
A1	0.000	0.100
A2	1.050	1.150
b	0.300	0.500
c	0.100	0.200
D	2.820	3.020
E	1.500	1.700
E1	2.650	2.950
e	0.950(BSC)	
e1	1.800	2.000
L	0.300	0.600
θ	0°	8°



IMPORTANT NOTICE

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc.'s integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or severe property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.