



DESCRIPTION

The A8501 Series is a fixed frequency, constant current step-up DC/DC converter ideal for driving OLED. Output voltage of up to 22V can be derived, and from a li-ion battery supply, the output voltage can be 12V drive OLED. A 2Ω resistance of large pipes is integrated in the circuit, withstand voltage can support 22V, with a small SOT-25 package saves PCB space and BOM cost.

The A8501 is available in SOT-25 package.

ORDERING INFORMATION

Package Type	Part Number	
SOT-25	E5	A8501E5R
		A8501E5VR
Note	V: Halogen free Package R: Tape & Reel	
AiT provides all RoHS products Suffix " V " means Halogen free Package		


FEATURES

- Input voltage range 2.7V~5.5V
- Output voltage range up to 22V
- Oscillation frequency 1MHz±20%
- Efficiency 88%
- Control PWM control
- Stand-by Current ISTB=1.0uA(MAX)
- Load capacitor 10uF,ceramic
- LX limit Current 300mA
- Available in SOT-25 Package

APPLICATION

- Mobil phones, PHS
- PDAs
- Digital still cameras

TYPICAL APPLICATION

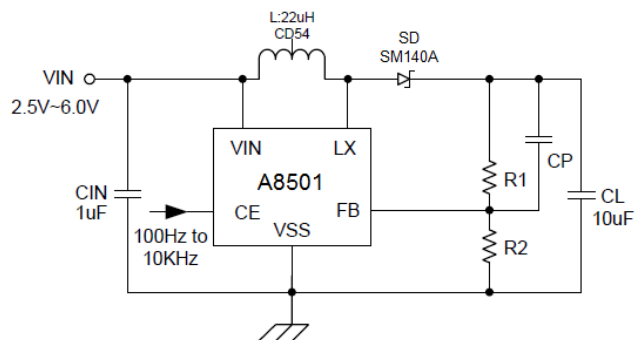


$$\frac{V_{OUT}}{FB} = \frac{R1+R2}{R2}$$

Note: R1 and R2 can be adjusted by the voltage of V_{OUT} and FB Pin; (recommended resistor R1 =875K, R2 =100K, CP=100pF)



PIN DESCRIPTION

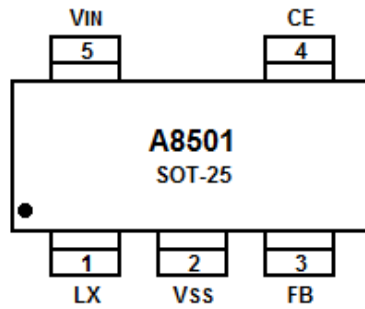

Top View

Pin #	Symbol	Function
1	LX	Switch
2	V _{SS}	Ground
3	FB	Voltage Feedback
4	CE	Chip Enable, "High" Active.
5	V _{IN}	Power Input



ABSOLUTE MAXIMUM RATINGS

V _{IN} , V _{IN} Pin Voltage	V _{SS} -0.3V ~ V _{SS} +7V
V _{LX} , LX Pin Voltage	V _{SS} -0.3V ~ V _{SS} +22V
V _{FB} , FB Pin Voltage	V _{SS} -0.3V ~ V _{SS} +7V
V _{CE} , CE Pin Voltage	V _{SS} -0.3V ~ V _{SS} +7V
I _{LX} , LX Pin Current	1000mA
P _D , Power Dissipation	250mW
T _{OPR} , Operating Temperature range	-40°C ~ +85°C
T _{STG} , Storage Temperature range	-55°C ~ +125°C

Stress beyond above listed "Absolute Maximum Ratings" may lead permanent damage to the device. These are stress ratings only and operations of the device at these or any other conditions beyond those indicated in the operational sections of the specifications are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.



ELECTRICAL CHARACTERISTICS


T_A=25°C, unless otherwise noted

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Circuits
FB Control Voltage	V _{FB}		1.205	1.23	1.255	V	1
Output Voltage Range	V _{OUT}		V _{IN}		22	V	
Lx Operating Voltage Range	V _{LX}				22	V	
Operating Voltage Range	V _{IN}		2.5		6	V	
Stand-by Current	I _{STB}	V _{CE} =0V, V _{LX} =5V			1	μA	3
Supply Current 1	I _{DD1}			650		μA	2
Supply Current 2	I _{DD2}	V _{IN} =V _{LX} , V _{FB} =2V		90		μA	3
Oscillation Frequency	F _{OSC}		0.8	1.0	1.2	MHz	2
Maximum Duty Cycle	MAXDTY	V _{CONT} =0.4V		75		%	2
Efficiency	EFFI	V _{IN} =3.6V; R _{LED} =20Ω		88		%	1
Current Limit	I _{LIM}	V _{IN} =3.6		300		mA	4
OVP Overvoltage Limit	OVPVL			20		V	2
LX On Resistance		V _{IN} =3.6V, V _{LX} =0.4V		2.0		Ω	2
LX Leak Current	I _{LXL}			0	1	A	3
CE 'H' Voltage	V _{CEH}		0.65			V	2
CE 'L' Voltage	V _{CEL}				0.2	V	2
CE 'H' Current	I _{CEH}	V _{IN} =V _{LX} , V _{FB} =0.4V			0.1	A	3
CE 'L' Current	I _{CEL}	V _{CE} =0V, V _{LX} =5V			-0.1	A	3
FB 'H' Current	I _{CEH}	V _{IN} =V _{LX} , V _{FB} =0.4V			0.1	A	3
FB 'L' Current	I _{CEL}	V _{CE} =0V, V _{LX} =5V			-0.1	A	3




TYPICAL PERFORMANCE CHARACTERISTICS

1. Efficiency vs. Output Current

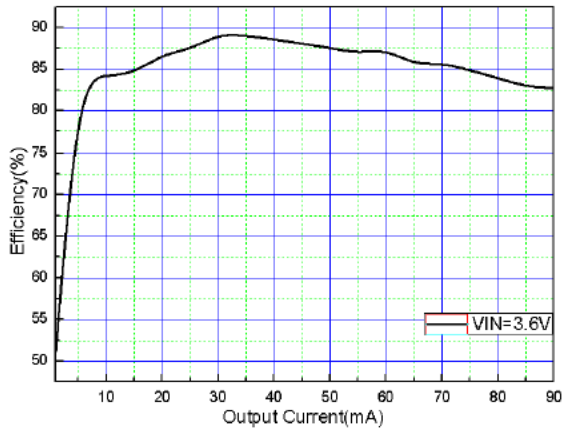


2. Output Voltage vs. Temperature

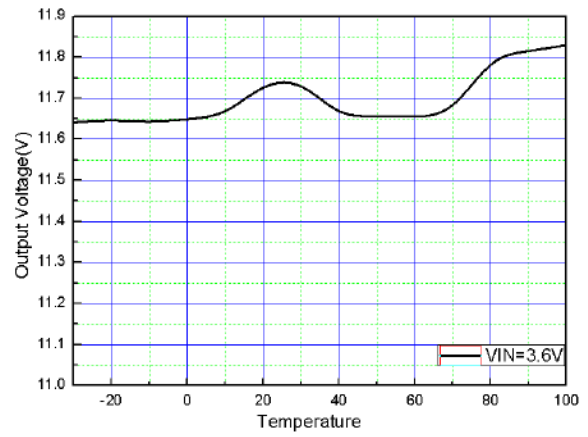




TEST CIRCUIT


1.

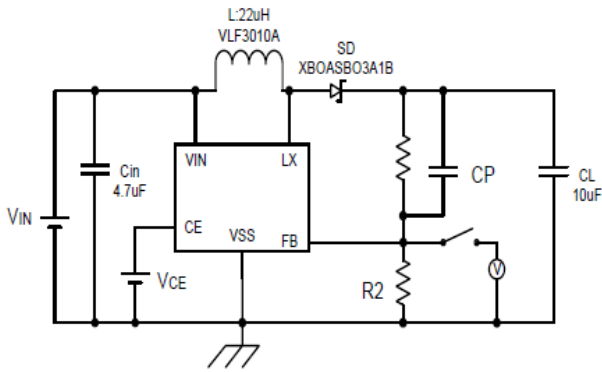


2.

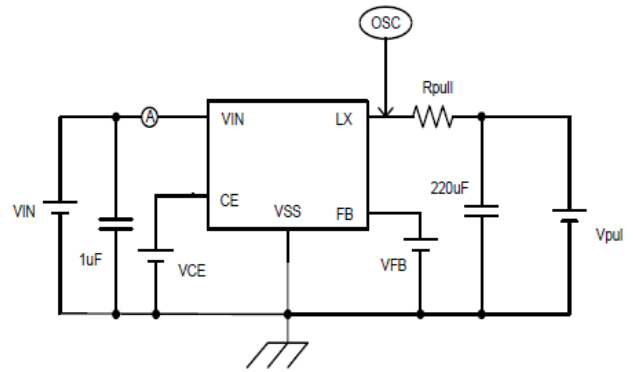

3.

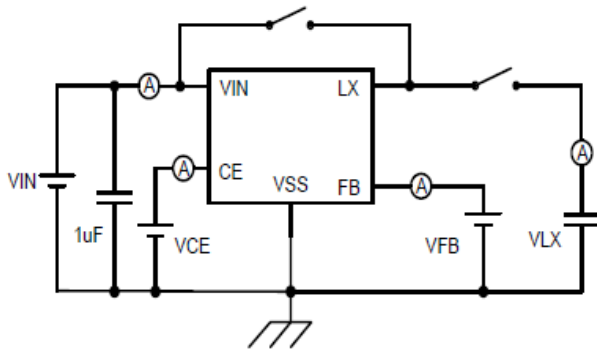


4.

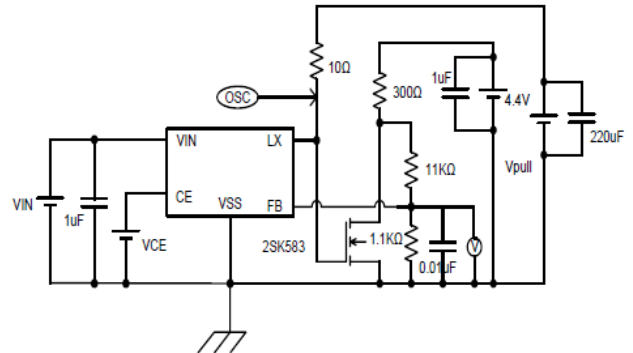




BLOCK DIAGRAM

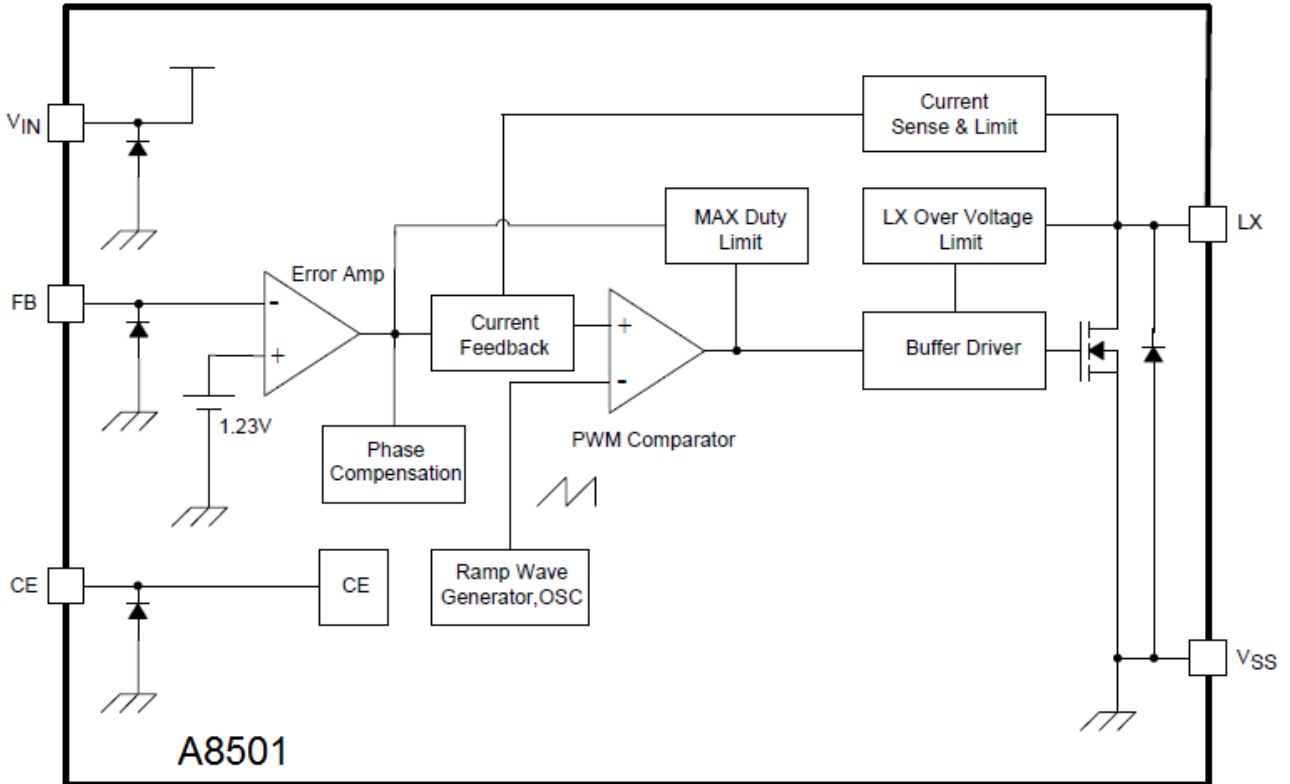



PACKAGE INFORMATION

Dimension in SOT-25 (Unit: mm)

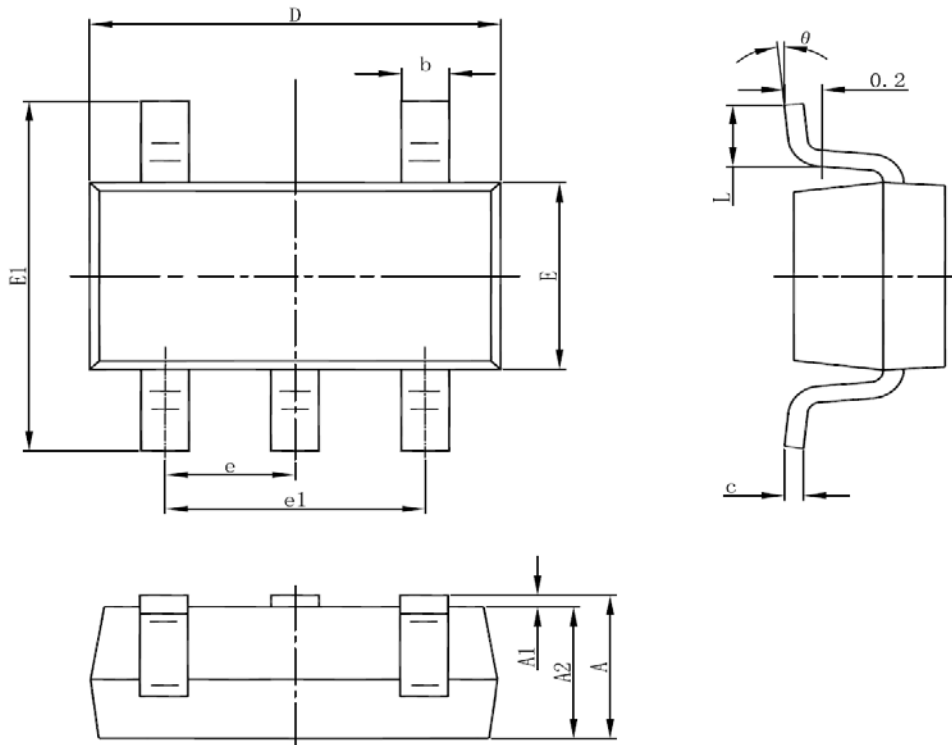

Symbol	Min	Max
A	1.050	1.250
A1	0.000	0.100
A2	1.050	1.150
b	0.300	0.500
c	0.100	0.200
D	2.820	3.020
E	1.500	1.700
E1	2.650	2.950
e	0.950(BSC)	
e1	1.800	2.000
L	0.300	0.600
θ	0°	8°



IMPORTANT NOTICE

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc.'s integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or severe property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.