



DESCRIPTION

The DAN202U is available in SC-70 package


ORDERING INFORMATION

Package Type	Part Number
SC-70	DAN202U
Note	3,000pcs/Reel
AiT provides all RoHS Compliant Products	

FEATURES

- Ultra high speed switching
- Suitable for high packing density layout.
- High reliability.
- Available in SC-70 package

PIN DESCRIPTION

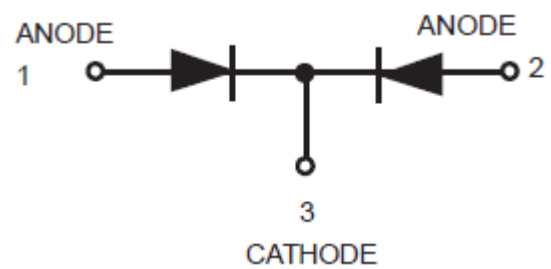



ABSOLUTE MAXIMUM RATINGS

Each Diode

V_R , Reverse Voltage		80Vdc
I_o , Forward Current		100mAdc
$I_{FM(surge)}$, Peak Forward Surge Current		300mAdc
V_F , Forward voltage	$I_f = 100mA$	1.2 V
I_R , Reverse current	$V_R = 70V$	0.1 μ A
C_T , Capacitance between terminals	$f = 1MHz$	3.5 pF
t_{rr} , Reverse recovery time	$V_R = 6V, I_f = 5mA$	4nS

Stresses above may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated in the Electrical Characteristics are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.



TYPICAL CHARACTERISTICS

Figure 1. Power attenuation curve

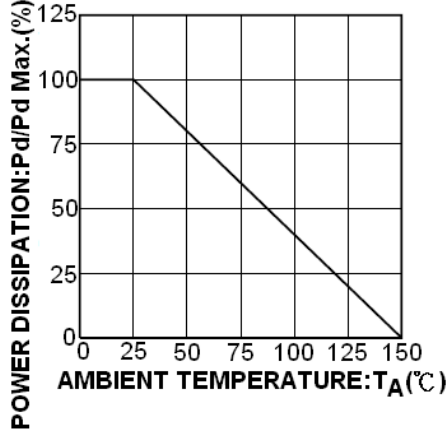


Figure 2. Forward characteristics (P Type)

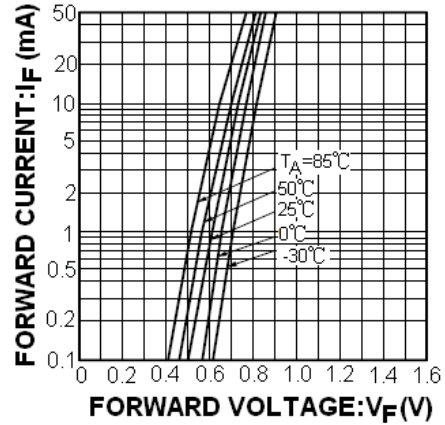


Figure 3. Reverse characteristics (P Type)

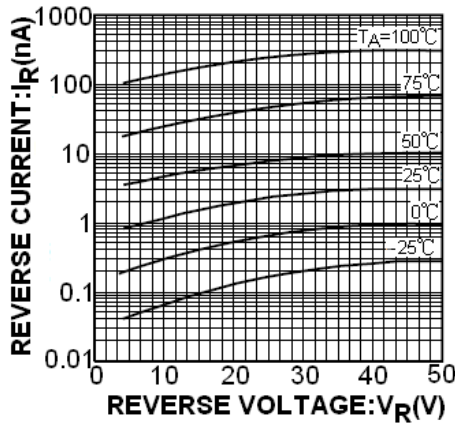


Figure 4. Forward characteristics (N Type)

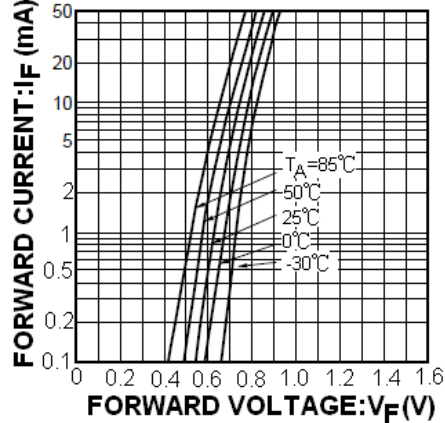


Figure 5. Reverse characteristics (N Type)

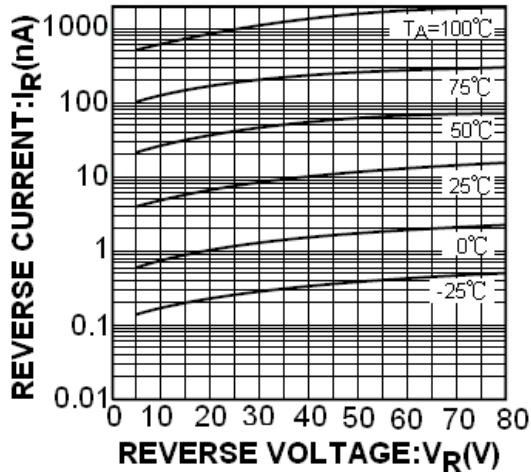


Figure 6. Capacitance between terminals characteristics

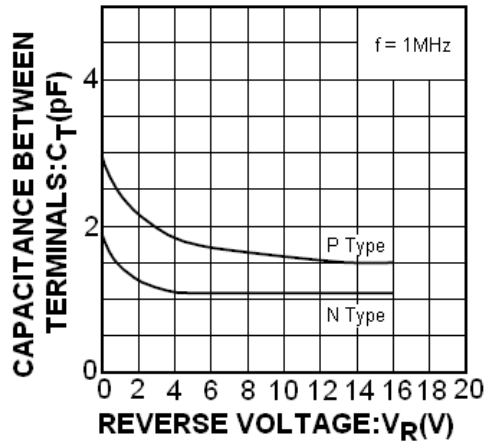




Figure 7. Reverse recovery time


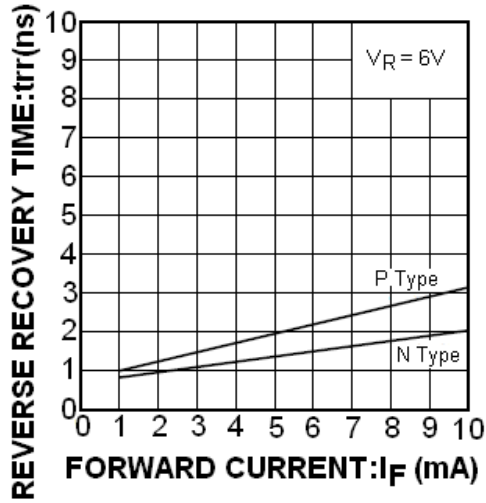



Figure 8. Reverse recovery time (t_{rr}) measurement circuit



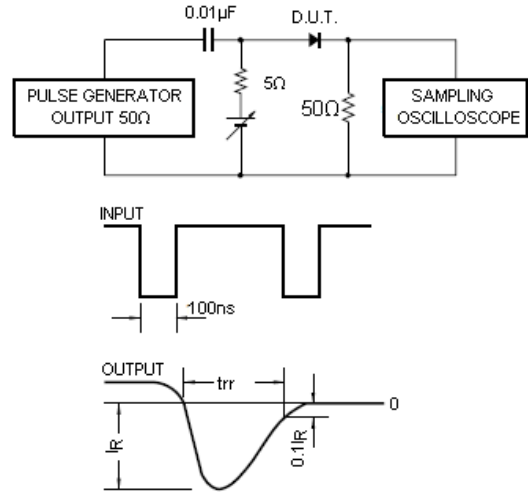

PACKAGE INFORMATION

Dimension in SC-70 Package (Unit: mm)

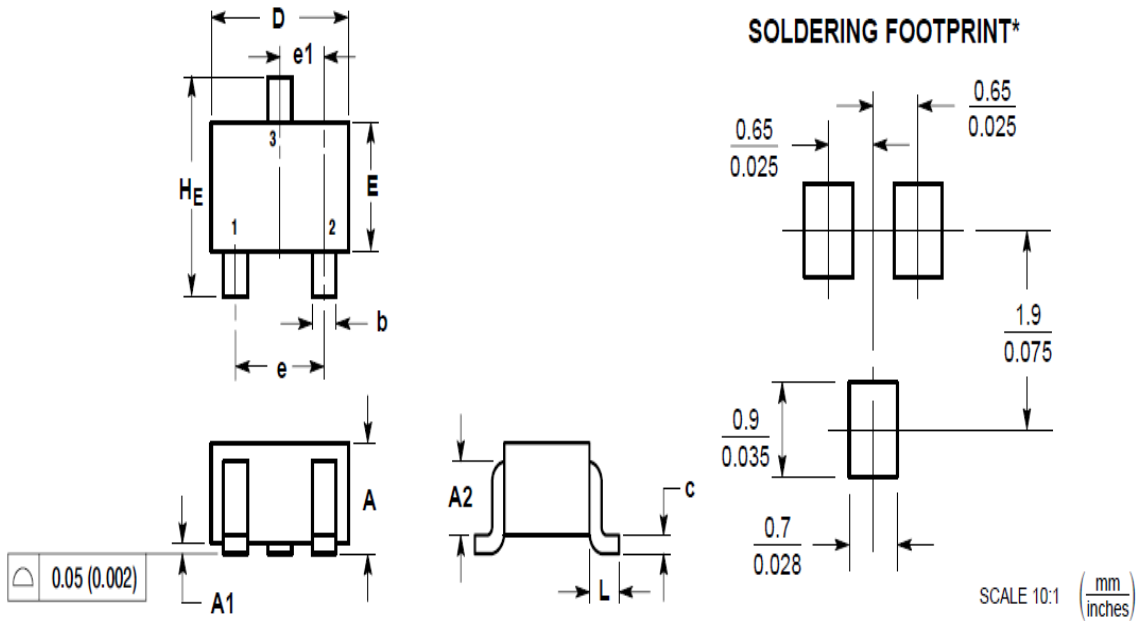

DIM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	0.80	1.00	0.032	0.040
A1	0.00	0.10	0.000	0.004
A2	0.7 REF		0.028 REF	
b	0.30	0.40	0.012	0.016
c	0.10	0.25	0.004	0.010
D	1.80	2.20	0.071	0.087
E	1.15	1.35	0.045	0.053
e	1.20	1.40	0.047	0.055
e1	0.65 BSC		0.026 BSC	
L	0.425 REF		0.017 REF	
HE	2.00	2.40	0.079	0.095



IMPORTANT NOTICE

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its product, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc.'s integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or severe property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.